

Our

3 PRONG APPROACH

Promise

Dedicated Staff



Tired of 800 numbers, talking to people who don't even live here? Count on the same dedicated members, every time you call in!

Dedicated Service



Forget being on hold for 2 hours just to hear they won't be there for 2 weeks... we are local, we are here for you when you need us.

Dedicated Experience



Our technicians have been trained properly, so you don't have to worry about repeat visits. Customer Experience is everything to us!

Don't gamble with your security. Call the local professionals.

Click today at www.securcom.ca to learn more

Thank you for supporting local business!

Lethbridge Alberta Proud
Office: 403-380-4385

SECURCOM
TECHNOLOGIES INC.

Protecting Southern Alberta, One System at a time

All-in-one and Always On!



Door Contact



Window Contact



Water Bug



Outdoor Contact



Arm/Disarm Remote Key



Panic Button



CO2 / Smoke



Motion Detector



Thermo Stat



WIFI Doorbell





Lamp Module



Outdoor Camera

- ✓ Expandable
- ✓ State of the Art
- ✓ Simple to Use
- ✓ Remote App
- ✓ Local Service
- ✓ Strong Support

Ask Us How!!

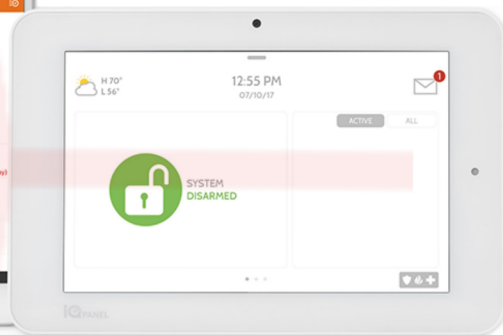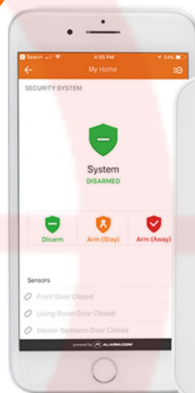

403.380.4385
www.securcom.ca

SECURCOM
TECHNOLOGIES INC.

Protecting Southern Alberta, One System at a time

Moving the Goalposts ... again



IQ Panel 4 PowerG + 319.5MHz

IQ Panel 4 PowerG + 345MHz

IQ Panel 4 PowerG + 433MHz



Easiest Installation Ever

SmartMount system, all internal antennas, on-screen Installation Wizard



QuadSound Audio Streaming

Bluetooth Audio from your Smart Phone using four 4 watt speakers



Best Built-in Camera

8MP 120° wide angle camera w/ FlexTilt. Peek-in, Disarm Photos, Alarm Videos



Better All-In-One Range

LTE and WiFi Dual-Path, Dual SRF featuring PowerG, Z-Wave 700 Series, Bluetooth 4.2



Best Differentiating Features

Bluetooth Touchless Disarming, Live View, Live Answer, Built-in Glass Break



Best Integrations

Best in class Residential, Commercial, MDU, Builder, Wellness support

SPECIFICATIONS

Items	Parameters	IQ Panel 4
LCD Display	Size	7 inch LCD
	Resolution	1280 x 800 pixels
	Brightness	300 cd/m2
	RGB Color	24bit, 16.9 Million Colors
Touchscreen	Type	Capacitive glass multi-touch
User Codes	Up to 242	Role-based (Dealer, Installer, Master, User, Guest, Duress)
Network	WiFi	WiFi 802.11 a/b/g/n/ac dual band 2.4/5GHz - including built-in access point capability
	Cellular	LTE Category 4 (Bands 2/25, 4/66, 5, 7, 12/17, 13, 14 Non-FirstNet, 26)
Z-Wave Plus (700)	Up to 137 Devices	137 total (Up to 80 lights, up to 20 locks, up to 10 thermostats, up to 6 garage doors, up to 21 misc.)
PowerG	Up to 128 Devices	915 MHz Long Range Secure Encrypted 2-Way Wireless
Security RF	Up to 128 Devices	Depending on the model: Either S-Line Encrypted 319.5 MHz, 345 MHz, or 433 MHz
Bluetooth	Disarm & Audio Streaming	Bluetooth Low Energy (BLE) 4.2
Flash Memory	Internal Storage	16GB NAND Flash
LED Indicator	Status LED	Triple full color RGB LED
Speaker/Siren	4W x 4	QuadSound 4x front-facing 4W speakers and 85-decibel siren
Camera	Front Camera	8MP Wide-Angle, 120° Field-of-View, Fixed-Focus Camera, with Flex-Tilt Adjustment
Microphone	MEMS x3	3 MEMS (Micro-Electro-Mechanical System) Microphones with Echo Cancellation
Tamper	Tamper Switch	Dual panel and wall tamper with spring release and Smash and Grab reporting
Battery	Type 18650	Rechargeable Lithium Ion 3000mAh Rated for over 24 hours
Buttons	Hard Button	Single wake/sleep button, all user controls through touch interface
Mechanical	Dimensions	6.1"H x 7.5"W x 1"D (155mm x 191mm x 26mm)
Power Supply	DC	7v DC 1000mA CC, Input 100-240VAC 50/60Hz Adapter evaluated at 120vAC for UL/cUL
Mount	Back Plate	SmartMount for wall mounting included. SmartMount table stand or SmartMount IQ Base Table Stand with built-in Subwoofer sold separately
Certifications	FCC	FCC: 2AAJXQS-IQPANEL4 (may contain additional modules with separate FCC IDs)
	IC	IC: 11205A-QSIQPANEL4
	UL	UL-985, UL-1023, UL2610, ULC-S545, ULC-S304
Temperature	Operational	0°C to 49°C, 32°F to 120.2°F, up to 93% relative humidity, indoor, dry ordinary locations use only
	Storage	-20°C to 50°C, -4°F to 122°F
Operating System	Android 9	Security & Home Automation Touch and Swipe Interface
Processor	8 core	Qualcomm Snapdragon 8 core SOM (System on a Module) with 16GB of NAND Flash





ALARM.COM®

1080p Outdoor Wi-Fi Camera with HDR and Two-Way Audio

Data Sheet

ADC-V724

www.alarm.com

© 2021 Alarm.com. All rights reserved. 210402

Specifications

Image sensor: 1/3", 2 MP, 1920x1080, HDR

Recording Compression: H.264

Live resolution options: Up to 1920 x 1080

Recording resolution options: Up to 1920 x 1080

Horizontal Field of View: 117 degrees

Vertical Field of View: 65 degrees

Diagonal Field of View: 140 degrees

Wi-Fi: 802.11 support: b/g/n/ac, 2.4 & 5 GHz

Ingress Protection: IP66

Low Light Sensitivity: 0.5 lux with IR

IR Range: Up to ~49 ft (15 m)

Image adjustments: Flip, brightness, contrast, saturation, sharpness, exposure

Operating Humidity: 20%-100% (non-condensing) RH

Dimensions (L x W x H): 2.5 x 2.5 x 4.5" (6.35 x 6.35 x 11.43 cm)

Requirements

Power: 12 V – 1 A DC power adapter (included)

Network: Wi-Fi (2.4 or 5 GHz) connection to broadband Internet



Overview

The ADC-V724 is Alarm.com's first outdoor camera with Two-Way Audio, allowing for proactive deterrence of unwanted activity on a customer's property. Powerful Video Analytics from Alarm.com can detect and alert customers to people and animals active around their homes or businesses. Two-Way Audio gives your customers the power to discourage unwanted visitors. Plus, thanks to Onboard Recording with Smart View your customers can locally record encrypted video onto a microSD (sold separately) and view footage from anywhere.

Included accessories

- Power adapter
- Installation guide

Features

- Two-Way Audio to hear and speak with visitors
- Microphone and speaker
- Video Analytics for smarter detection and relevant alerts
- Onboard Recording with Smart View for continuous, local, encrypted recordings
- High Dynamic Range (HDR)
- Wi-Fi (2.4 or 5 GHz)
- Audio included in recorded clips for additional awareness
- Works with the Alarm.com Customer Website and Mobile App
- Improved mount for long-term stability
- Easier access to microSD card door

LED Guide

Status LED	
	Power off
	Power on, camera booting
	Local network connection
	Connected to Alarm.com
	WPS Mode
	Wi-Fi Access point mode
Trouble Condition	
	No local or internet connection
Factory Reset	
	Camera resetting to factory default

Video Analytics Doorbell

See more, know more and do more with the new VDB770 Video Analytics Doorbell.

The latest in our best-in-class Design Studio Series product line, this sleek Video Analytics Doorbell makes it easy for customers to get instant front door awareness no matter where they are.

Powerful New Features

An expanded vertical view lets customers check on doorstep deliveries—right from their Alarm.com app. The HD resolution camera and improved Two-Way Audio make it easier than ever for customers to see and speak with visitors.

HELPFUL ALERTS

VDB770 uses Video Analytics for rapid people detection and fewer false alerts. Customers can know when someone is at the door, even if they don't ring the bell.

REAL-TIME CONVERSATIONS

It's easy for customers to have two-way conversations with visitors at any time of day or night with improved Two-Way Audio, HD resolution, HDR and infrared night vision.

INSTANT AWARENESS

Customers can check the live view video feed from the app or record clips automatically when the doorbell is pressed or motion is detected.

MOBILE-OPTIMIZED EXPERIENCE

Customers can view visitors in full screen portrait mode and speak with them wherever they are—whether they're on the go or on the couch.


ADDED CONVENIENCE AND SECURITY

In addition to disarming their system and unlocking or locking doors, customers can also adjust lights, open and close garage doors and arm their system directly from the doorbell call screen.

TOUCHLESS DOORBELL FEATURE

Visitors are able to ring the bell just by standing in front of the door—no contact required.

Visit the Alarm.com Partner Portal to purchase the new VDB770 and access marketing, installation and support resources.

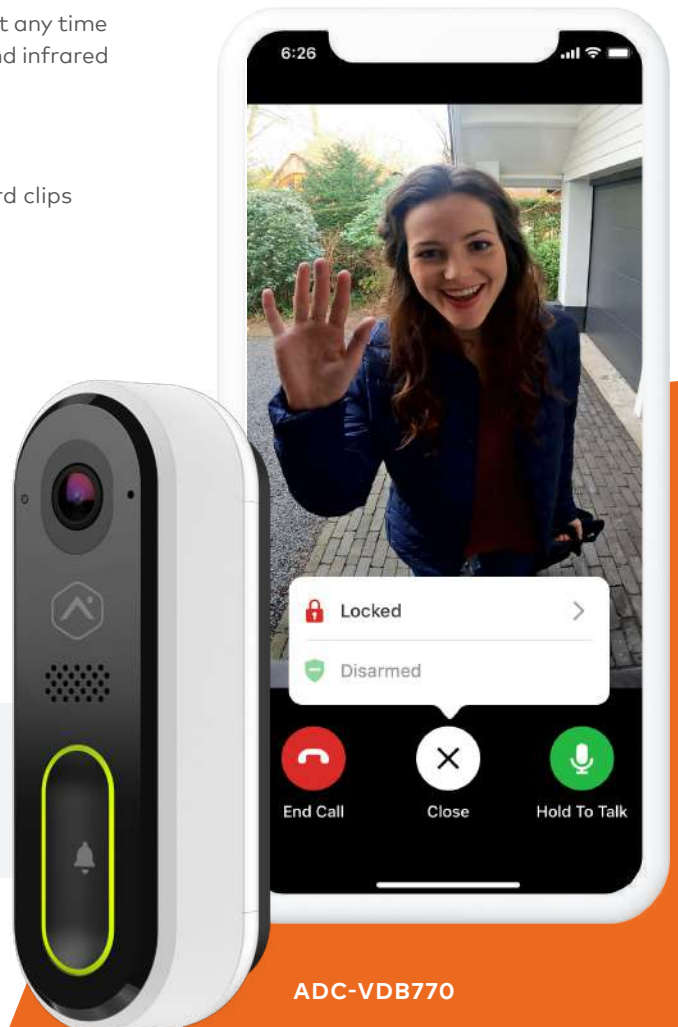

ADC-VDB770



ALARM.COM®

Alarm.com Flex IO Data Sheet

ADC-FLEX-100

www.alarm.com

© 2020 Alarm.com. All rights reserved. 201008

Specifications

Ingress protection: IP56

Temperature: Battery life will be optimal between temperatures of 32°F to 140°F (0°C to 60°C). The device can operate from -40°F to 140°F (-40°C to 60°C).

Reed switches: 3 unique reed switch locations to choose from that can be activated with included magnet

Loop input: Flex IO can be powered by battery or external power.

- Dry Contact, Normally Open (NO), or Normally Closed (NC)
- Optional EOL resistor can be 300 kΩ or higher

Relay output: If used, Flex IO must be externally powered (not compatible with battery power).

- Up to 24 V (AC or DC), 40 mA max current
- Can be used only for control lines/dry contact. Can never be connected directly to control electrical loads, which will damage the device.

Dimensions: Main unit: 6.8 x 2.2 x 1.3" (17.3 x 5.6 x 3.3 cm), Magnet: 3.1 x 0.68 x 0.87" (7.9 x 1.7 x 2.2 cm)

Power: Works with DC-wired power or battery power (battery backup recommended for wired installations)
6 to 15 VDC supply, minimum 1 A

Battery power: Four 1.5 V AA lithium batteries (iron disulfide) 2+ years of battery life (depending on battery chemistry and operating temperature)



Overview

The Flex IO enables new levels of flexibility for monitoring valuable property and assets anywhere that LTE connectivity is available. Whether used with a backyard gate or a remote storage unit, the Flex IO empowers users to keep an eye on what matters most. It can be used with the included magnet to monitor doors, gates, and other entryways. It also comes equipped with input and output options for integrating compatible devices that lack long-range connectivity.

Features

- Detect open/close using magnetic reed switch
- Detect state change for third-party device using Loop Input
- Change state of third-party and device using Relay Output (requires DC power to support always-on cellular connection)

In the Box

- Optional EOL (end of line) resistor to detect cut wires. EOL resistor can be 300 kΩ or higher. Normally Open configuration is preferred for low power usage.
- Optional mount tamper and battery door tamper alerts
- Multiple mounting options, including screws or zip ties
- Multiple carrier options, including AT&T and Verizon (US only)

All-in-one and Always On!



Home

SECURCOM TECHNOLOGIES INC.

Bears Home

- Home
- Automation
- Notifications
- Activity
- Users
- Settings

Welcome!
Partition 1 Disarmed at 4:31 PM

System OK

Scenes

- Home
- Away
- Sleep
- Wake Up
- New Scene

Mon -2° Tue 3° Wed 4° Thu 8°

Partition 1
DISARMED

Feature Suggestions

- First Enhancements: 2 out of 3
- Reminders & Alerts: 5 out of 10
- Smart Rules & Schedules: 2 out of 5
- More Enhancements: 0 out of 1

Water Sensors

- 14 Bsmt Flood Utility Room: DRY
- 2 Bsmt Sump - Warning: DRY
- 3 Bsmt Sump - Alarm: DRY
- 34 Kitchen Sink Flood Sensor: DRY

Recent Activity

- Partition 1: 13 minutes ago: DISARMED
- Partition 1: 13 minutes ago: ARMED STAY
- 35 Kitchen Fridge Flo...: 44 minutes ago: BATTERY OK
- 35 Kitchen Fridge Flo...: 44 minutes ago: WATER ALARM

Kitchen Thermostat
19° Inside 17°

TEMP MODE PRESET

Living Room Lamp 100%

Garage Heater OFF

powered by **ALARM.COM**

ALARM.COM

Copyright © 2000-2020, Alarm.com. All rights reserved. Terms Privacy Policy